


MR16 杯燈

型號：SLP-MR16, SLP-MR16-12



SLP-MR16

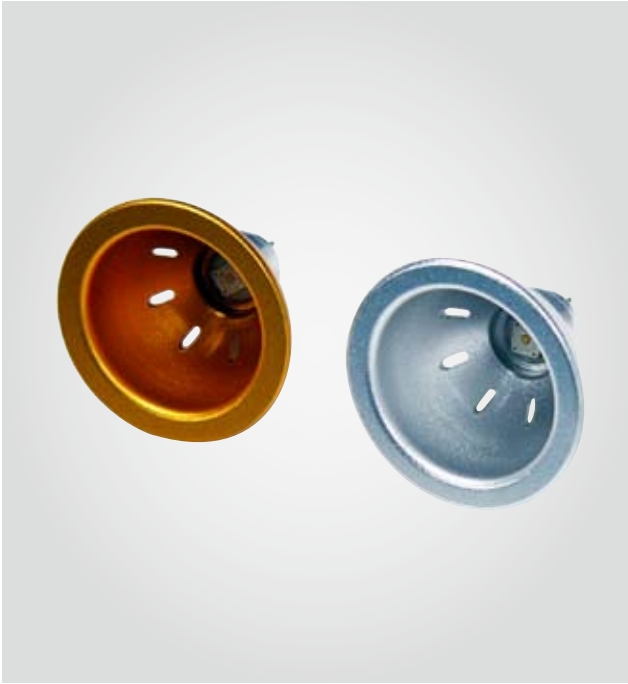

SLP-MR16-12

一般規格

- 順向電壓：3.2V typical
最大電流：800mA
演色性：> 80
光強度：如右表
光束角：如右表
操作溫度：0 ~50°C

LED Current	Beam Angle	Diameter ϕ d at 1m	Center Line Intensity (1cd = 1Lux at d = 1m)			
			3000K • Gold	3000K • Silver	4500K • Silver	6500K • Silver
350mA	72°	1.45m	80cd	100cd		190cd
	30°	0.54m		180cd		
	15°	0.26m		650cd		1000cd
	7°	0.13m				
800mA	72°	1.45m	140cd	190cd		350cd
	30°	0.54m		350cd		
	15°	0.26m		1000cd		2000cd
	7°	0.13m				

Note: The illuminance diameter and Lux of n meter (nm) away can be calculated by:

$$\phi \text{ d at nm} = \text{nm} \cdot \phi \text{ d}/1\text{m}$$

$$\text{Lux at nm} = (\text{value of cd}) / \text{n}^2 \dots \text{due to (value of cd) = (value of Lux) at 1 meter.}$$

直銷商

定價： NT\$365.00 / SLP-MR16 (內含SLD-C003)
NT\$320.00 / SLP-MR16-12